


Technical data


Item	Oil flow	Capacity	Weight	Voltage	Frequency	Current absorption	Power	Ø Fan	Air flow	Noise level	Rpm
	[l/min]	[l]	[kg]	[V]	[Hz]	[A]	[W]	[mm]	[m <sup>3</sup> /h]	[dB(A)]	
<b>HY0571-03A</b>	20-160	3,7	19,5	230/400	50/60	0,58	134	400	1820	68	

Performance

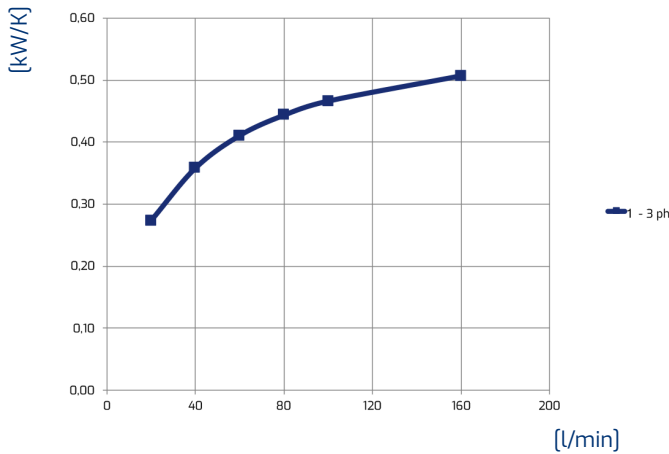

OIL T 80°C  
T Amb. 40°C  
1 kW = 860 Kcal/h - 1 HP = 0.75 kW

Pressure drop

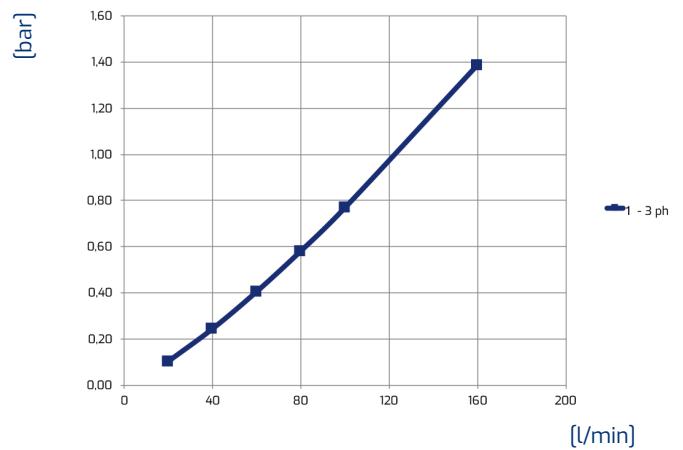

ISO VG 32 at 40°C

Viscosity - ISO VG 32 Oil

Oil	22	32	46	68	150
Correction factor	0,8	1	1,2	1,6	3