

## DT6EC - OPERATING CHARACTERISTICS

### SHAFT END SECTION

	FLOW								SPEED (rpm)		PRESSURE (bar)	
	Lts/min.at 1000 rpm	132	142	156	165	197	213	227	270	Mín.	Máx.	Intermit.
Gal/min.at 1200 rpm	42	45	50	52	62	66	72	85	500	2200*	240	210

\* See page 41 for further information about speed & pressure.

### COVER END SECTION

	FLOW												SPEED (rpm)		PRESSURE (bar)		
	Lts/min.at 1000 rpm	11	17	21	26	34	37	46	58	64	70	79	89	100	Mín.	Máx.	Intermit.
Gal/min.at 1200 rpm	3	5	6	8	10	12	14	17	20	22	25	28	31	500	2800*	275	240*

\* See page 41 for further information about speed & pressure.

## DT6EC - FLOW & INPUT POWER DIAGRAMS

### SHAFT END



See **DT6E** Single Pumps for flow and input power diagrams (page 46)

### COVER END

See **DT6C** Single Pumps for flow and input power diagrams (page 42)

## DOUBLE PUMPS DT6EC - DIMENSIONS

DIMENSIONS IN MILLIMETERS. 1" = 25,4 mm

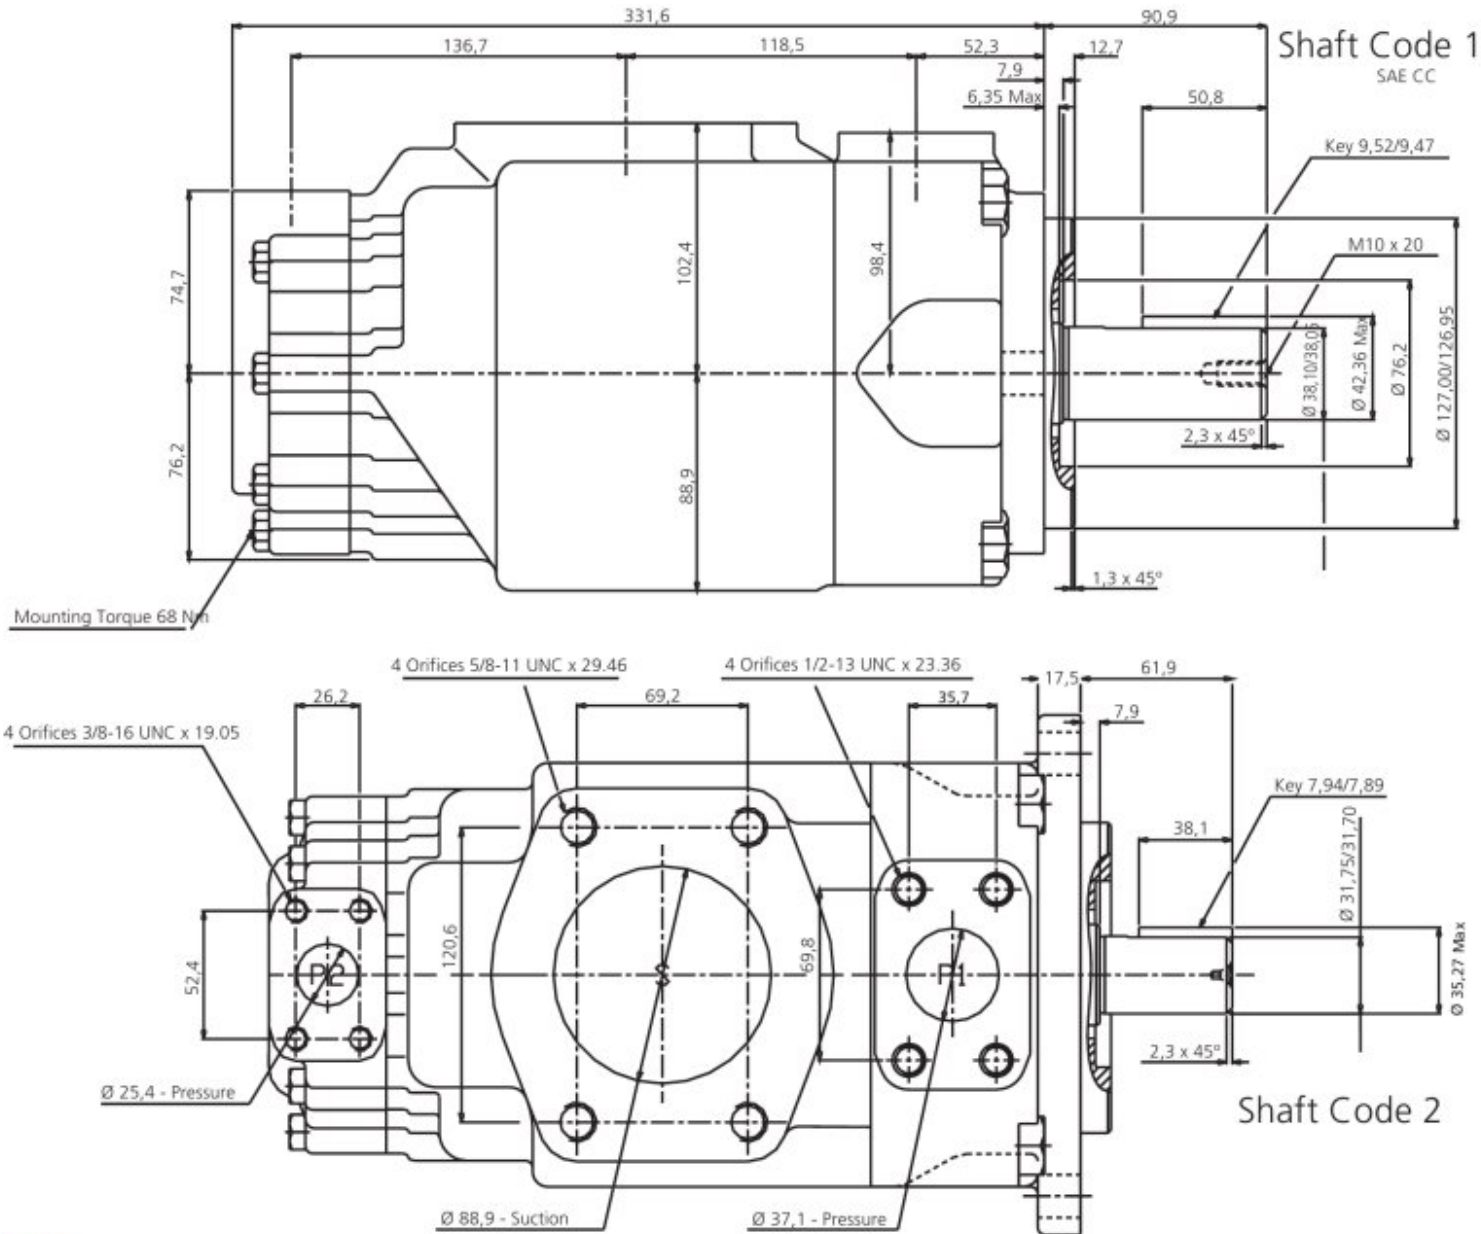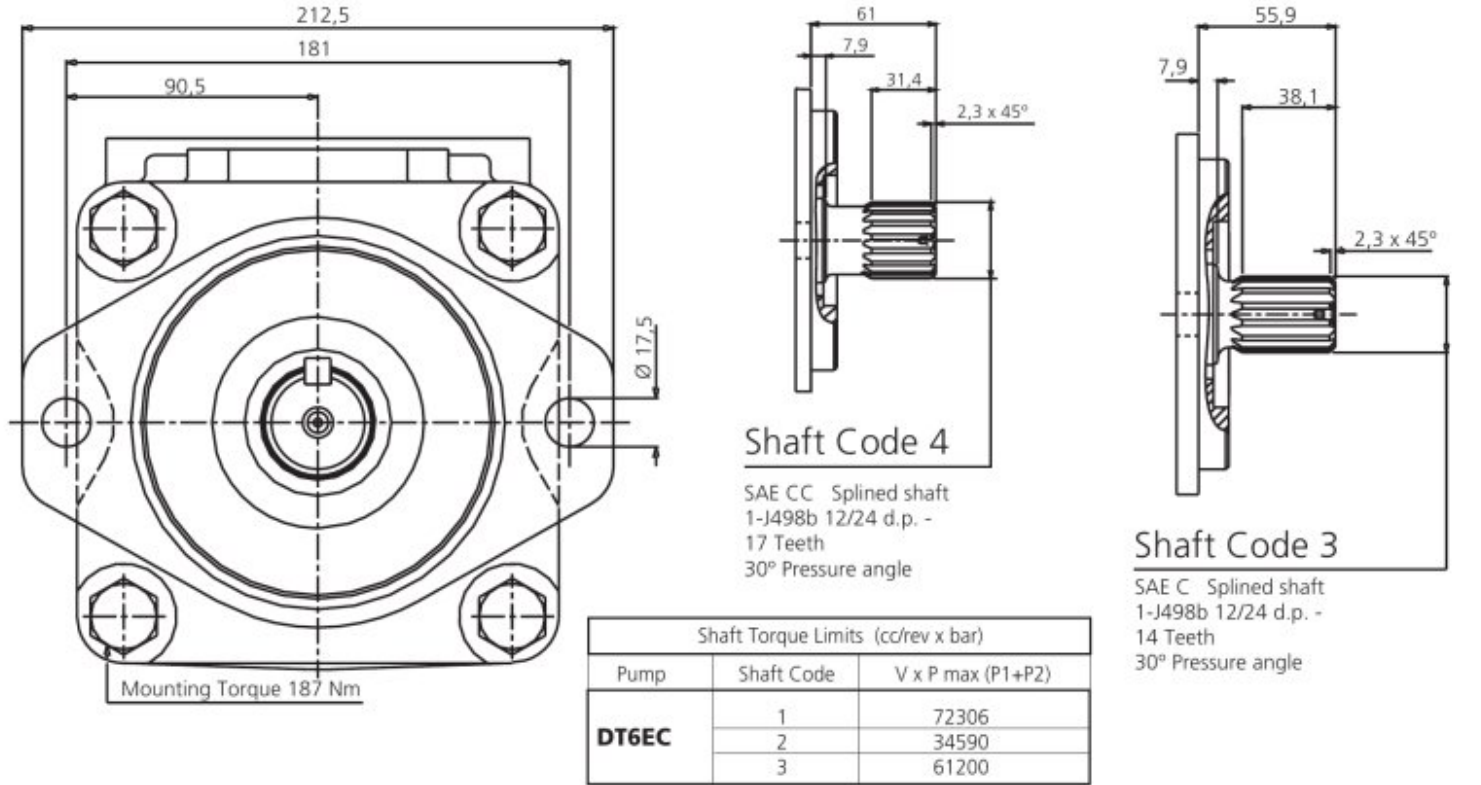

DATA SHEET